

# AVIDHIFI

## ISORAK ASSEMBLY INSTRUCTIONS



**AVID HIFI Ltd**

Bicton Industrial Park, Kimbolton, Huntingdon, Cambridgeshire. PE28 0LW ENGLAND  
www.avidhifi.com - info@avidhifi.co.uk

## Introduction

Thank you for purchasing your AVID ISORAK product. The ISORAK system has been designed to offer a very flexible and high quality racking solution, which is also simple to assemble.

All ISORAK systems start with a ISORAK BASE, comprising 135mm posts with spikes and your choice of shelf.

Once you have a base shelf, you can add levels simply by purchasing additional shelves and selecting appropriate post lengths to accommodate your equipment height.

Post kits are available in sets of 3 or 4 legs, finished either in Silver or Black, shelves are either black or Oak

## Base Post Kit

The Base Kit comprises of:

3 (or 4) 135mm base posts

3 (or 4) Spikes and Locking Nuts

## Post Kits


A Post kit consists of:

3 (or 4) Posts (135, 165, 205, 245 or 305mm)

3 (or 4) Shelf Fixing Clamp

3 (or 4) Steel Balls

3 (or 4) M10 Hex bolts

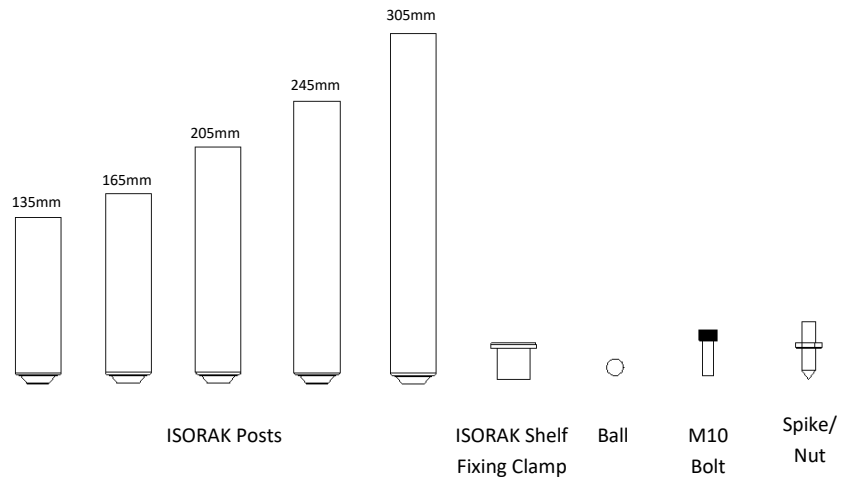

## Assembly Instructions

Whether assembling a Base or a Shelf, the process is more or less the same:

1. Open the Post kit and separate the posts from their Shelf Fixing Clamps by removing the M10 bolts (beware if spikes are fitted, as these are very sharp). Be careful not to lose any parts.
2. Insert the Shelf Fixing Clamp into the top side of the shelf
3. Insert a M10 bolt from the top, through the Shelf fixing clamp
4. Screw the post onto the thread of the M10 Bolt—Hand tight is adequate.
5. Repeat steps 2 to 4, for all posts

Additional steps for Base assembly:

1. Adjust the spikes to ensure the base is level and stable then lock the spikes in place by tightening the lock nuts

Additional Steps for Shelf Assembly:

1. Place ball into top of the lower Shelf's Fixing Clamp (on top of M10 Bolt)
2. Carefully place new shelf assembly on top of lower assembly, making sure the posts align with each other properly.

